

BUILD AN ENTIRE HOT & COLD MENU WITH JUST ONE MACHINE



BROOD NITRO V2PX


Why it's Better

Feature	Nitro V2PX	Kegeator
Nitrogen Tanks	✗ No	✓ Yes
Unlimited Nitro	✓ Yes	✗ No
Kegs	✗ No	✓ Yes
Fridge	Chills to 36°F at tap	Constant refrigeration
Heat	Heats to 167°F at tap	✗ No
Uses Lots of Space	✗ No	✓ Yes
Portable	✓ Yes	✗ No
Easy Transport	✓ Yes	✗ No
Heavy Lifting	✗ No	✓ Yes
Weight	25 Kg	60 Kg
Plug & Play	✓ Yes	✓ Yes
Air Filter	Filters air to 1 micron	N/A
Drip Tray	✓ Yes	✓ Yes
Maintenance	Flush with water daily	Flush with water daily

What is the BROOD Nitro?

Nitro beverages have never been easier! Our ground breaking Nitro V2PX series draws cold brew coffee from any container, keg, or bag; chills it to 36°F or heats it to 167°F, and infuses it with nitrogen extracted from the air. This means no separate nitrogen tank is required. Within seconds you'll have velvety smooth nitro cold brew in your hands!

And now for the first time ever, you can serve a hot nitro on demand from a single nitro tap.

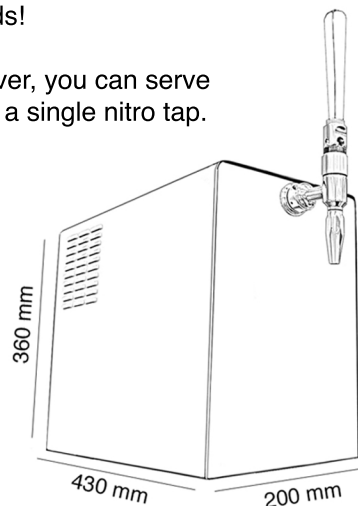


Benefits

- The BROOD Nitro V2PX dispenses both nitro and still cold brew from the same tap
- Extracts nitrogen from the air; no nitrogen tank necessary
- Pulls from any container, kegs are only one option
- Plug & play in 2 minutes
- Consistency with every pour
- Chills on demand to 36°F
- Works with any drink
- No need to deal with gas tanks or companies
- Compact design; can be placed over or under the counter
- Customizable color, design and tap handle
- Patent Pending
- Certified to NSF 18



Nitro & Still from One Tap.

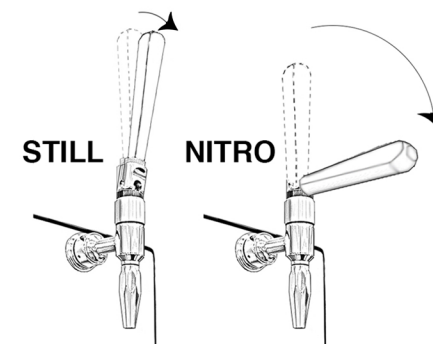

Hot Nitro
on Demand.



Single Tap Cold

\$3,395



Dual Tap Cold

\$3,995



Dual Tap Hot/Cold

\$5,499

MSRP	Single Tap V2PX	Dual Tap V2PX Cold	Dual Tap V2PX Hot & Cold
Function	Cold Nitro & Cold Still	Cold Nitro & Still <i>each tap</i>	Cold Nitro/Still & Hot Nitro/Still
Power Supply	100-120 V / 60 Hz 200-240 V / 50 Hz	100-120 V / 60 Hz 200-240 V / 50 Hz	100-120 V / 60 Hz 200-240 V / 50 Hz
Phase	1	1	1
Amps	1.8A	3.9A	18.0A
Dimensions (W/H/L)	200/360/430mm	300/350/445 mm	300/350/445 mm
Weight	25.0 kg	26.0 kg	32.0 kg
Dispensing capacity	62 L/hour	62 L/hour	62 L/hour
Coffee temperature at tap	36°F (+/- 3°F)	36°F (+/- 3°F)	Cold: 36°F (+/- 3°F) Hot: 167°F (+/- 5°F)
Internal Tubing Capacity	20 oz	20 oz <i>each tap</i>	20 oz Cold Tap; 6 oz Hot Tap
Optional Accessories	Bag In Box Adaptor BiB Bags BiB Boxes 1.5 gal. Reservoir	Bag In Box Adaptor(s) BiB Bags BiB Boxes 1.5 gal. Reservoir	Bag In Box Adaptor(s) BiB Bags BiB Boxes 1.5 gal. Reservoir
Warranty	1 year	1 year	1 year
Pressure at tap	34 Psi	34 Psi	34 Psi
Certification Listing(s)	NSF 18, UL 399, CSA 120, CE-LVD, CB, SASO, CE-EMC, RSA, PSE	NSF 18, UL 399, CSA 120, CE-LVD, CB, SASO, CE-EMC, RSA, PSE	15 July 2019

